


Product Data Sheet

32mm Straight Connector



John Guest

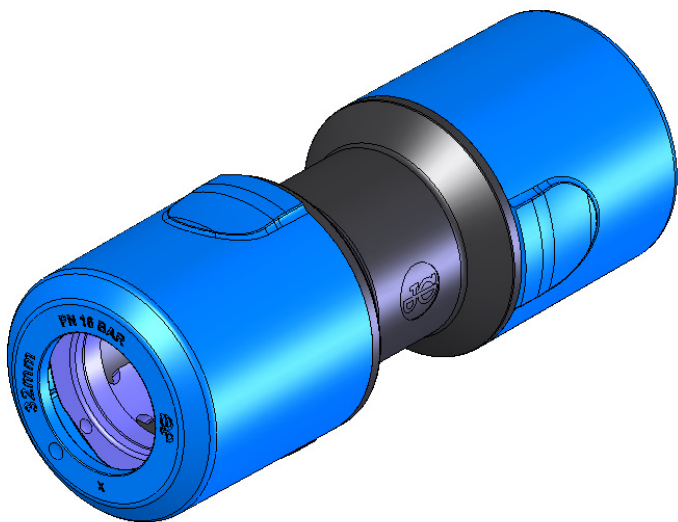


Applications	
Cold Water Services (Above & Below Ground)	✓

The John Guest 32mm Straight Connector has been designed to connect MDPE pipes used above or below ground, to convey potable water from distribution mains to individual properties.

Working Pressures and Temperatures

Max temperature 20°C Max Pressure 16 bar

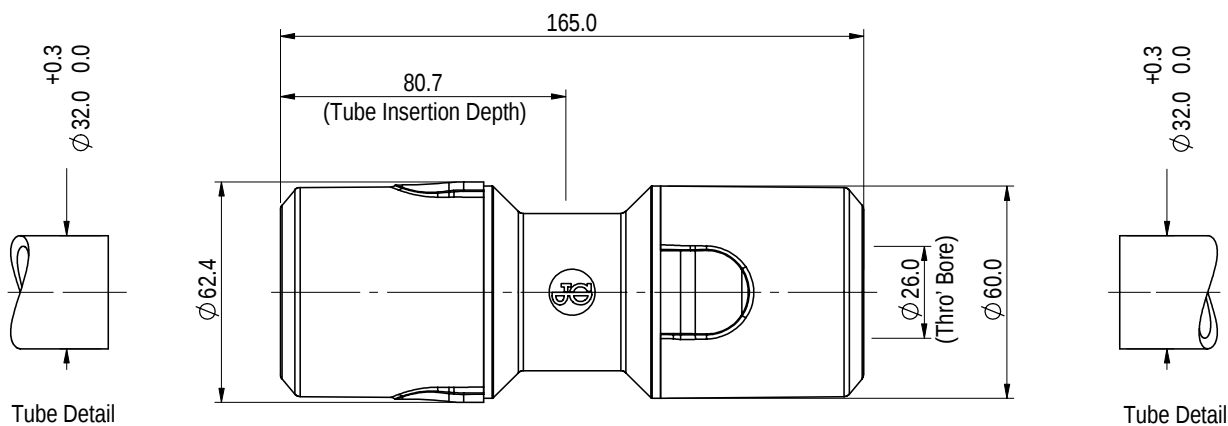

Part Description	Material
Body	Polypropylene (Glass Filled), Black
Collet Covers	Acetal Co-Polymer (Unfilled), Blue
Collets	Acetal Co-Polymer (Unfilled), Blue & Stainless Steel
Support Washers	Acetal Co-Polymer (Unfilled), Blue
'O' Rings	Ethylene Propylene (EPDM), Black

All Dimensions in mm

THE COPYRIGHT IN THIS DRAWING AND THE PRODUCTS REFERRED THEREON BELONG TO JOHN GUEST INTERNATIONAL LIMITED AND THIS DRAWING NOR THE INFORMATION CONTAINED HEREIN SHALL BE PRODUCED IN ANY FORM OR USED FOR ANY PURPOSE WITHOUT WRITTEN CONSENT © 2008

The company has a policy of continuous research and development and reserves the right to amend without notice the specification and design of all products illustrated. For details of terms and conditions and any other technical enquiries, please contact our Customer Services Department.

ISSUE 2 GA 20-11-08

DS-UG403B